

Etabloc 065-040-160 CC
 ETB 065-040-160-CCSBV12 WXECX2HHB

Operating point 1 Dimensioning operating point

Operating conditions (purchaser requirements)

Target flow rate		Vapour pressure determined	0.02337 bar.a
Target head		Minimum inlet pressure required	-0.3 bar
Fluid	Water, raw water	Specified ambient temperature	20 °C
Fluid variant	without further specification	Installation altitude above sea level	1,000 m
	50658		
Specified fluid temperature	20 °C		
Density Fluid handled	998 kg/m ³		
Kinematic viscosity Fluid handled	1 mm ² /s		

Operating conditions (performance)

Flow rate	35 m ³ /h	Maximum power input at duty point	4.992 kW
Minimum permissible flow rate	7.538 m ³ /h	Maximum power input / curve	7.005 kW
Head	36 m	Pump speed	2,955 1/min
Shut-off head	38.83 m	Discharge pressure-max.	3.8 bar
Efficiency Pump	68.62 %		
NPSH required	2.72 m		

Design data pump

Scope of supply Pump supplied by KSB	Pump + motor	Mains voltage	400 V
Pump standard	EN 733	Mains frequency	50 Hz
Shaft axis position	Horizontal	Minimum efficiency index MEI	0.5
Pump design	Close-coupled	Minimum permissible fluid temperature	-20 °C
Pump system design	Single-pump system	Maximum permissible fluid temperature	100 °C
Specification of wetted parts	Manufactured without paint wetting impairment substances	Quantity Stages, single-entry	1
Pump direction of rotation, viewed from casing side	Counterclockwise	Casing wear ring design suction-side	Flat
Impeller diameter D2	161 mm	Casing wear ring design discharge-side	Flat
Impeller type	Radial, closed, multi-channel	Installation chamber Casing cover	Conical (A-type cover)
Free passage	11.5 mm	Bearing bracket size / shaft unit	25
Nut lock for Impeller	No	Pump bearing type, non-drive end	Anti-friction bearing
Swirl break	No	Pump bearing type, drive end	Anti-friction bearing
Support foot	No	Pump directive	CE

* Special design

Etabloc 065-040-160 CC
 ETB 065-040-160-CCSBV12 WXECX2HHB

Nozzle connections pump

Nominal diameter Suction nozzle	DN 65	Nominal diameter Discharge nozzle	DN 40
Nominal pressure Suction nozzle	PN 16	Nominal pressure Discharge nozzle	PN 16
Suction nozzle position	Axial	Discharge nozzle position	0 deg
Suction nozzle design acc.to	EN1092-1	Discharge nozzle design acc.to	EN1092-1
Suction flange bolt hole pattern as per standard	EN1092-1	Discharge flange bolt hole pattern as per standard	EN1092-1
Flange facing type Inlet	Raised face (B,RF,C)		
Flange facing type Outlet	Raised face (B,RF,C)		

Auxiliary connections pump

6B Fluid Drain	G 1/4 Drilled and plugged	1M Pressure gauge Discharge nozzle	Without Without
6D Fluid Filling and venting	G 1/4 Drilled and plugged	1M Pressure gauge Suction nozzle	Without Without
Connection type 5B Venting and drain	G 1/4 Drilled and plugged		

Shaft sealing

Shaft seal type	SMS A-type cover, vented	Shaft seal code	Code 12
Piping plan	API plan 03	Shaft seal manufacturer inboard	BURGMANN
Determined pressure Seal chamber	0.26 bar	Mechanical seal type inboard	M37GN83
		Material Shaft seal inboard	Q12Q1M1GG1

Materials

Material Volute casing (102)	1.4408/A743CF8M	Material Bolts/Screws Hydraulic casing (902.01)	A4-70/A193 GR B8M CL2
Material Casing cover (161)	1.4408/A743CF8M	Material Screw plug Hydraulic casing (903.01)	A4/AISI 316
Material Shaft	1.4571	Material Static seal Screw plug Volute casing	A4/AISI 316
Material Impeller (230)	1.4408/A743CF8M	Material Nut Impeller fastening (920.95)	(CRNIMO ST INT)
Material Casing wear ring suction-side (502.01)	(CRNIMO ST INT)	Material Key	1.4571+C/A276 TP 316 COND B
Material Casing wear ring discharge-side (502.02)	(CRNIMO ST INT)		
Material Shaft protecting sleeve (523)	(CRNIMO ST INT)		
Material Static seal Discharge cover	DPAF DW001		
Material Drive lantern	EN-GJL-250/A48 CL 35B		
Material Support foot	WITHOUT		

* Special design

Etabloc 065-040-160 CC
 ETB 065-040-160-CCSBV12 WXECX2HHB

Driver

Electric motor	Yes	Rated speed Motor	2,950 1/min
Drive concept	With electric actuator	Number of motor poles	2
Drive standard, mechanical	IEC	Rated power Motor	5.5 kW
Drive standard electric	IEC	Motor power reserve determined	10.2 %
Motor bearing, insulated	No	Rated voltage Motor	230 V *
Motor manufacturer	Siemens	Motor winding	230 V / 400V *
Customer supply Drive	No	Rated frequency Motor	50Hz
Motor construction type	IM V15 (IM2011) IEC 60034-7	Motor switching type	Delta
Motor size	132S	Rated current Motor	9.9 A
Efficiency class	IE3 (Premium)	Starting current ratio Ia/In	8.9
Material motor housing	AL	Cos phi at 4/4 load	0.9
Enclosure Motor	IP55	Motor efficiency at 4/4 load	89 %
Thermal class	155 (F) nach IEC 60085	Directive Drive	CE
Temperature sensor motor	3 PTC thermistors		
Terminal box position of motor (looking at the motor shaft)	360 Grad		
Operation on a frequency inverter permitted	Yes (acc to motor manufact)		
Sound pressure level Motor	68 dBa		
Type series Motor manufacturer	1AV3130A *		

Variant Driver

Variant K10 Electric motor 8.2 - IEC MOTOR IN SPECIAL DESIGN

Coating

Aggregate

Surface preparation	Free from dirt, grease, rust
Properties Primer coat	Hydro dip primer, water-dilutable
Thickness Primer coat	60 µm
Properties Top coat	Acrylate dispersion water-thin
Thickness Top coat	40 µm
Colour Top coat	RAL5002 Ultramarine Blue

Packaging


Suitable for transport	Truck transport
Suitable for storage	Indoor storage
Packaging category	KSB's choice (A0)

Nameplates

Duplicate name plate	No
Material Installation part Pump (S185)	

* Special design


Etabloc 065-040-160 CC
 ETB 065-040-160-CCSBV12 WXECX2HHB

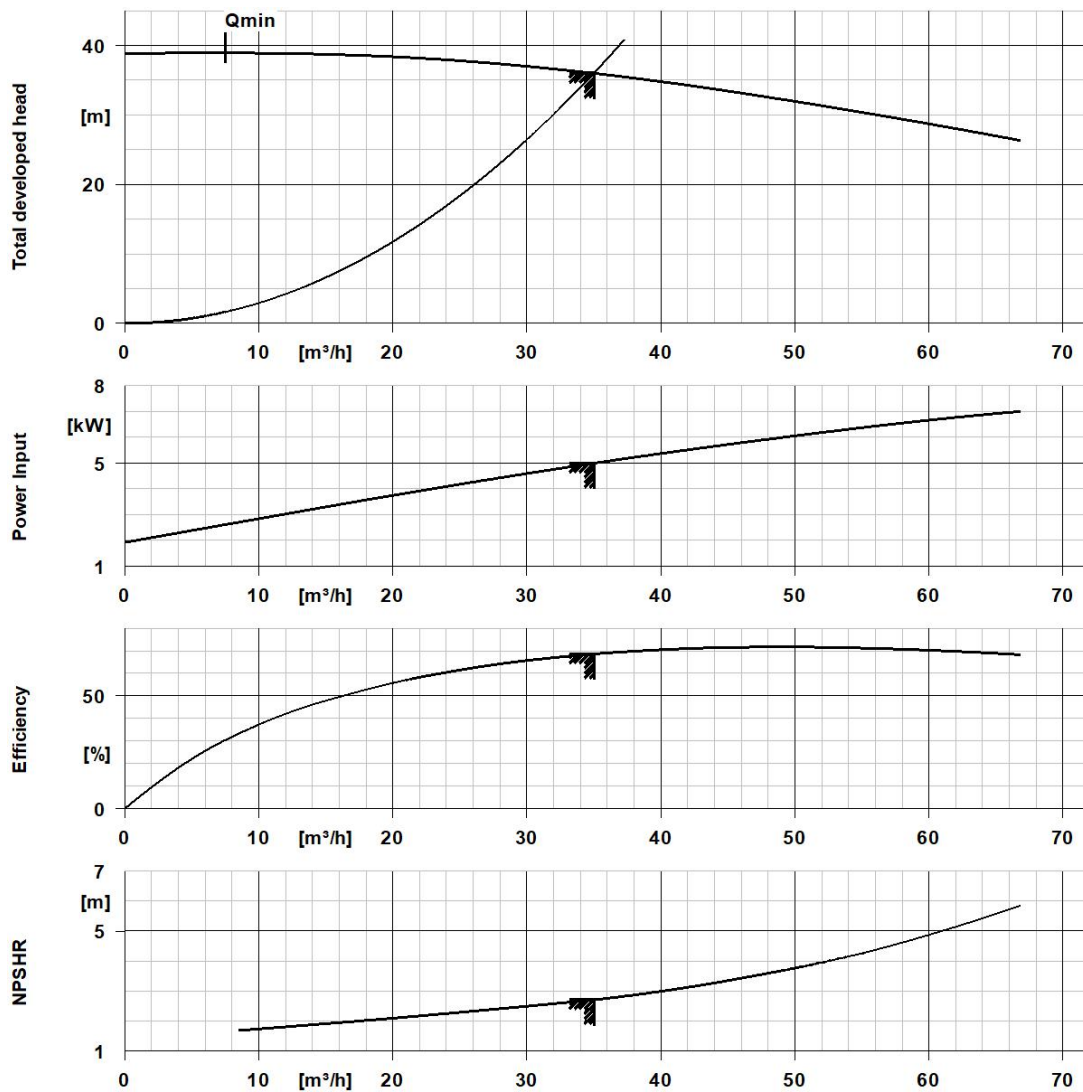

Curve Data

Pump speed	2,955 1/min	Efficiency Pump	68.6 %
Density Fluid handled	998 kg/m ³	Minimum efficiency index MEI	0.5
Kinematic viscosity Fluid handled	1 mm ² /s	Maximum power input at duty point	4.99 kW
Flow rate	35 m ³ /h	NPSH required	2.72 m
Head	36 m	Hydraulic impeller diameter	160.7 mm
		Hydraulic calculation according to standard/class	EN ISO 9906 Class 3B

Etabloc 065-040-160 CC
 ETB 065-040-160-CCSBV12 WXECX2HHB

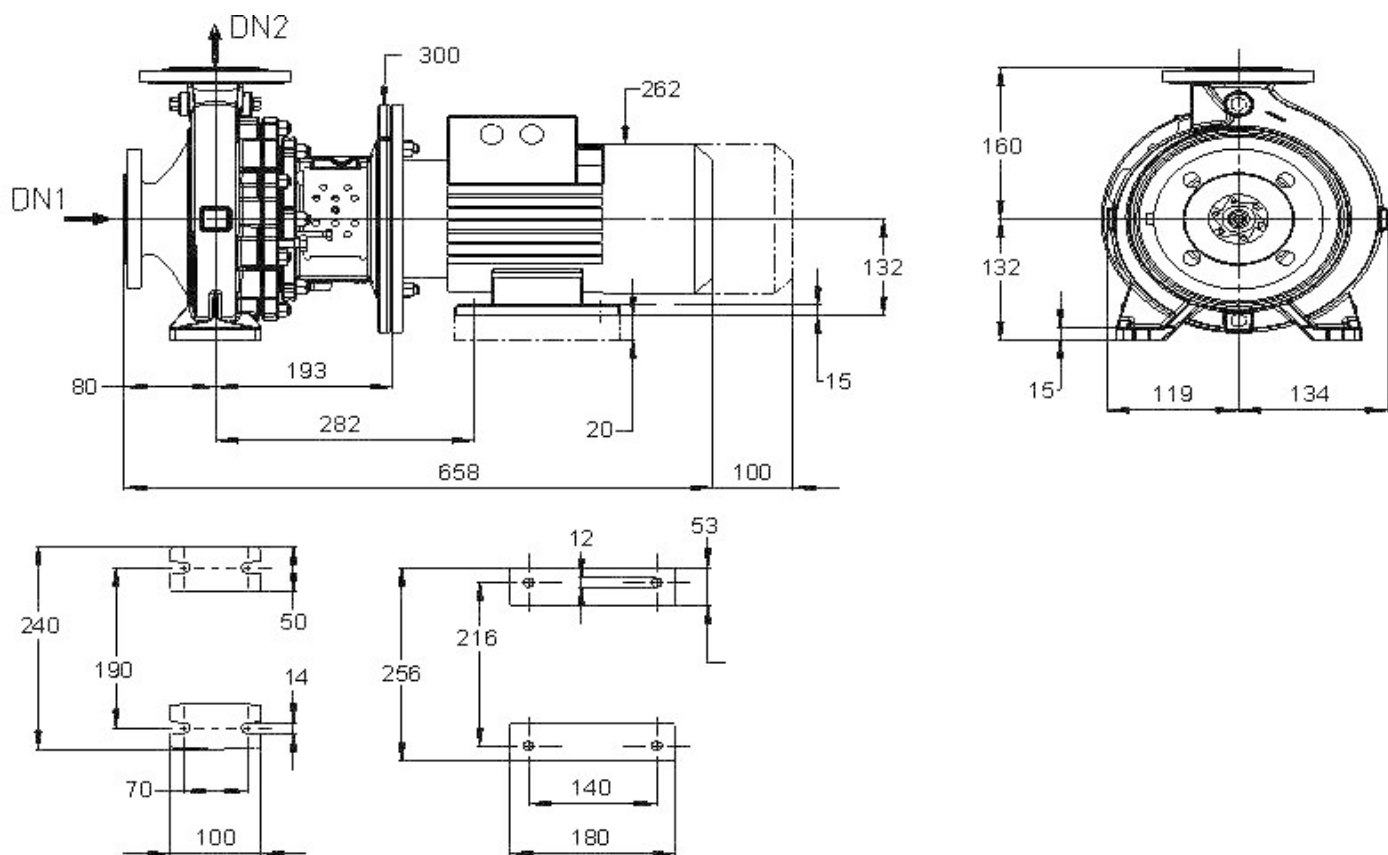

Drawing is not to scale.

Dimensions are given in mm

Motor

Motor manufacturer	Siemens
Motor size	132S
Rated power Motor	5.5 kW
Number of motor poles	2
Rated speed Motor	2,950 1/min
Terminal box position of motor (looking at the motor shaft)	360 Grad

Connections

Nominal diameter Suction nozzle	DN 65
Suction flange bolt hole pattern as per standard	EN1092-1
Nominal diameter Discharge nozzle	DN 40
Discharge flange bolt hole pattern as per standard	EN1092-1
Nominal pressure Suction nozzle	PN 16
Nominal pressure Discharge nozzle	PN 16

Net weight

Total weight Pump	37.6 kg
Total weight Drive	43 kg
Total weight Pump set	80.6 kg

Etabloc 065-040-160 CC

ETB 065-040-160-CCSBV12 WXECX2HHB

Connect pipelines stress-free

Plan for additional connections see extra drawing

Dimensional tolerances for shaft axis height: DIN 747

Dimensions without tolerances, middle tolerances to: ISO 2768-m

Connection dimensions for pumps: EN735

Dimensions without tolerances - welded parts: ISO 13920-B

Dimensions without tolerances - gray cast iron parts: ISO 8062-CT9