

Etabloc 100-080-200 KC

ETB 100-080-200-KCPBV11 WSFCX4HHB

Operating point 1

Dimensioning operating point

Operating conditions (purchaser requirements)

Target flow rate	70 m³/h
Target head	15 m
Fluid	Water
Fluid variant	Clean water
Specified fluid temperature	20 °C
Density Fluid handled	998 kg/m³
Kinematic viscosity Fluid handled	1 mm²/s

Vapour pressure determined	0.02337 bar.a
Minimum inlet pressure required	-0.3 bar.r
Specified ambient temperature	20 °C
Installation altitude above sea level	1,000 m

Operating conditions (performance)

Flow rate	69.99 m³/h
Minimum permissible flow rate	14.77 m³/h
Head	15 m
Shut-off head	16.04 m
Efficiency Pump	75.82 %
NPSH required	0.94 m

Maximum power input at duty point	3.764 kW
Maximum power input / curve	5.102 kW
Pump speed	1,478 1/min
Discharge pressure-max.	1.57 bar.r

Design data pump

Scope of supply Pump supplied by KSB	Pump + motor	Input voltage and frequency	Without
Pump standard	EN 733	Mains voltage	400 V
Design according to regulation	Swimming pool	Mains frequency	50 Hz
Shaft axis position	Horizontal	Minimum efficiency index MEI	0.4
Pump design	Close-coupled	Minimum permissible fluid temperature	0 °C
Pump system design	Single-pump system	Maximum permissible fluid temperature	60 °C
Specification of wetted parts	Manufactured without paint wetting impairment substances	Quantity Stages, single-entry	1
Pump direction of rotation, viewed from casing side	Counterclockwise	Casing wear ring design suction-side	Flat
Impeller diameter D2	210 mm	Casing wear ring design discharge-side	Flat
Impeller type	Radial, closed, multi-channel	Installation chamber Casing cover	Conical (A-type cover)
Free passage	15.2 mm	Bearing bracket size / shaft unit	35
Support foot	No	Pump directive	CE

Etabloc 100-080-200 KC ETB 100-080-200-KCPBV11 WSFCX4HHB

Nozzle connections pump

Nominal diameter Suction nozzle	DN 100	Nominal diameter Discharge nozzle	DN 80
Nominal pressure Suction nozzle	PN 16	Nominal pressure Discharge nozzle	PN 16
Suction nozzle position	Axial	Discharge nozzle position	0 deg
Suction nozzle design acc.to	EN1092-2	Discharge nozzle design acc.to	EN1092-2
Suction flange bolt hole pattern as per standard	EN1092-2	Discharge flange bolt hole pattern as per standard	EN1092-2
Flange facing type Inlet	Raised face (B,RF)		
Flange facing type Outlet	Raised face (B,RF)		

Auxiliary connections pump

6B Fluid Drain	G 3/8 Drilled and plugged	1M Pressure gauge Discharge nozzle	Without Without
6D Fluid Filling and venting	G 3/8 Drilled and plugged	1M Pressure gauge Suction nozzle	Without Without
5B Venting and drain	G 1/4 Drilled and plugged		

Shaft sealing

Shaft seal type	Single mechanical seal; seal chamber can be vented (A-type casing cover) - AV	Shaft seal code	Code 11
		Shaft seal manufacturer inboard	KSB's choice
Operating mode of mechanical seal (function)	API plan 03	Mechanical seal type inboard	KSB's choice
Determined pressure Seal chamber	-0.07 bar.r	Material Shaft seal inboard	BQEGG DW001

Materials

Material Volute casing (102)	EN-GJL-250+KATAPHORESE	Material Bolts/Screws Volute casing (902.01)	A4-70/A193 GR B8M CL2
Material Casing cover (161)	EN-GJL-250+KATAPHORESE	Material Nut Impeller fastening (920.95)	(CRNIMO ST INT)
Material Shaft	C45+N		
Material Impeller (230)	1.4408/A743CF8M		
Material Casing wear ring suction-side (502.01)	(CRNIMO ST INT)		
Material Casing wear ring discharge-side (502.02)	(CRNIMO ST INT)		
Material Shaft protecting sleeve (523)	(CRNIMO ST INT)		
Material Static seal Discharge cover	DPAF DW001		
Material Drive lantern	EN-GJL-250/A48 CL 35B		

Etabloc 100-080-200 KC ETB 100-080-200-KCPBV11 WSFCX4HHB

Driver

Electric motor	Yes	Rated speed Motor	1,465 1/min
Drive concept	Electric actuator	Number of motor poles	4
Drive standard, mechanical	IEC	Rated power Motor	5.5 kW
Drive standard electric	IEC	Motor power reserve determined	46.1 %
Motor bearing, insulated	No	Rated voltage Motor	400 V
Motor manufacturer	KSB's choice	Motor winding	400 / 690 V
Customer supply Drive	No	Rated frequency Motor	50Hz
Motor construction type	IM V15 (IM2011) IEC 60034-7	Motor switching type	Delta
Motor size	132S	Rated current Motor	11 A
Efficiency class	IE3 (Premium)	Starting current ratio Ia/I _n	8.9
Material motor housing	AL	Cos phi at 4/4 load	0.8
Enclosure Motor	IP55 (TEFC)	Motor efficiency at 4/4 load	89.6 %
Enclosure Unit	Without	Marking according to directive	CE
Thermal class	155 (F) nach IEC 60085	Drive	
Temperature sensor motor	3 PTC thermistors		
Terminal box position of motor (looking at the motor shaft)	360 °		
Operation on a frequency inverter permitted	Yes (acc to motor manufact)		
Sound pressure level Motor	67 dBa		
Type series Motor manufacturer	Acc. to motor manufacturer		

Coating

Aggregate

Surface preparation	Free from dirt, grease, rust
Properties Primer coat	Hydro dip primer, water-dilutable
Thickness Primer coat	60 µm
Properties Top coat	Acrylate dispersion water-thinned
Thickness Top coat	40 µm
Colour Top coat	RAL5002 Ultramarine Blue

Packaging

Suitable for transport	Truck transport
Suitable for storage	Indoor storage
Packaging category	KSB's choice (A0)

Nameplates

Duplicate name plate	No
----------------------	----


Performance Curve (Pump)



Page: 1 / 1

Etabloc 100-080-200 KC

ETB 100-080-200-KCPBV11 WSFCX4HHB

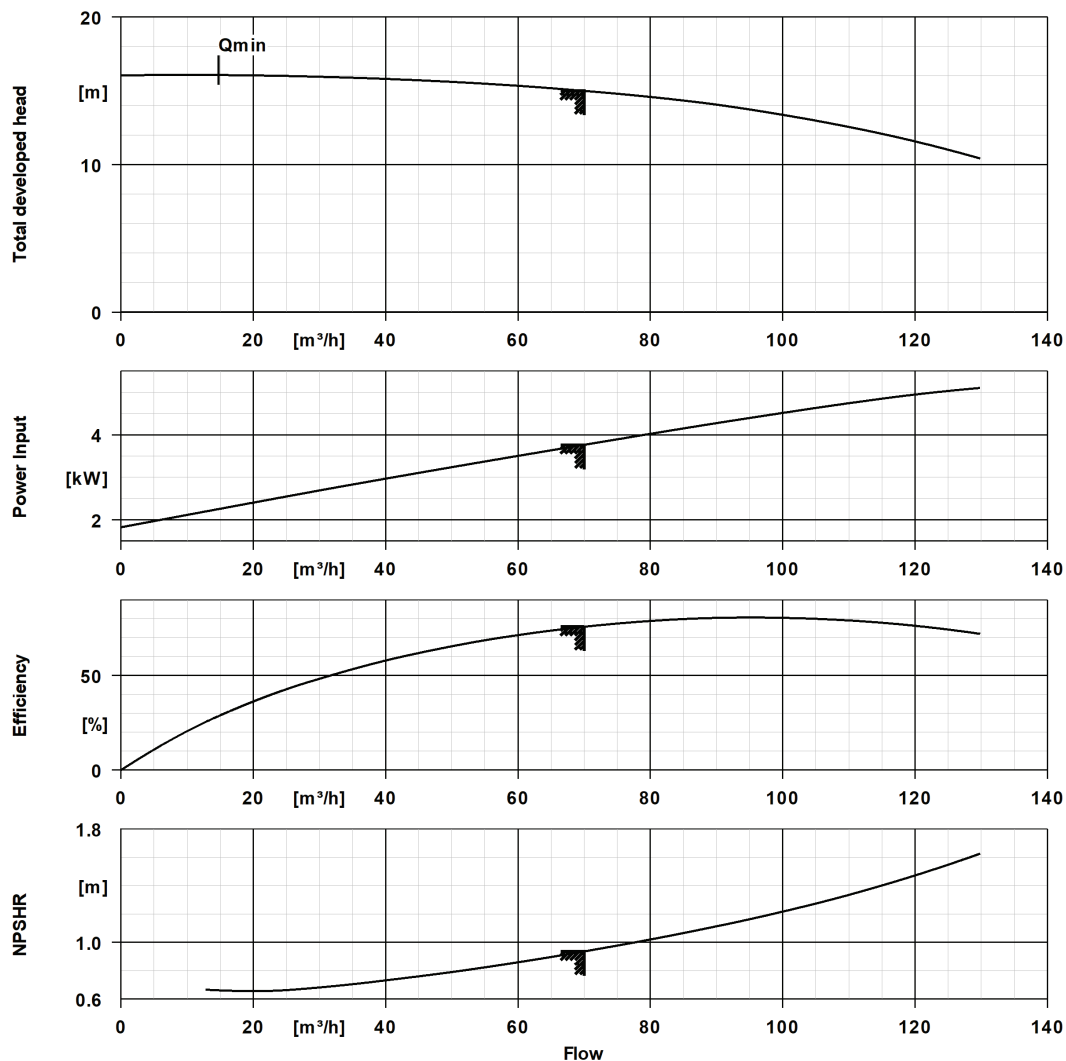

Curve Data


Pump speed	1,478 1/min	Efficiency Pump	75.8 %
Density Fluid handled	998 kg/m^3	Minimum efficiency index MEI	0.4
Kinematic viscosity Fluid handled	1 mm^2/s	Maximum power input at duty point	3.76 kW
Flow rate	70 m^3/h	NPSH required	0.94 m
Head	15 m	Hydraulic impeller diameter	209.8 mm
		Hydraulic calculation according to standard/ class	EN ISO 9906 Class 3B

Speed Curve



Page: 1 / 1

Etabloc 100-080-200 KC ETB 100-080-200-KCPBV11 WSFCX4HHB

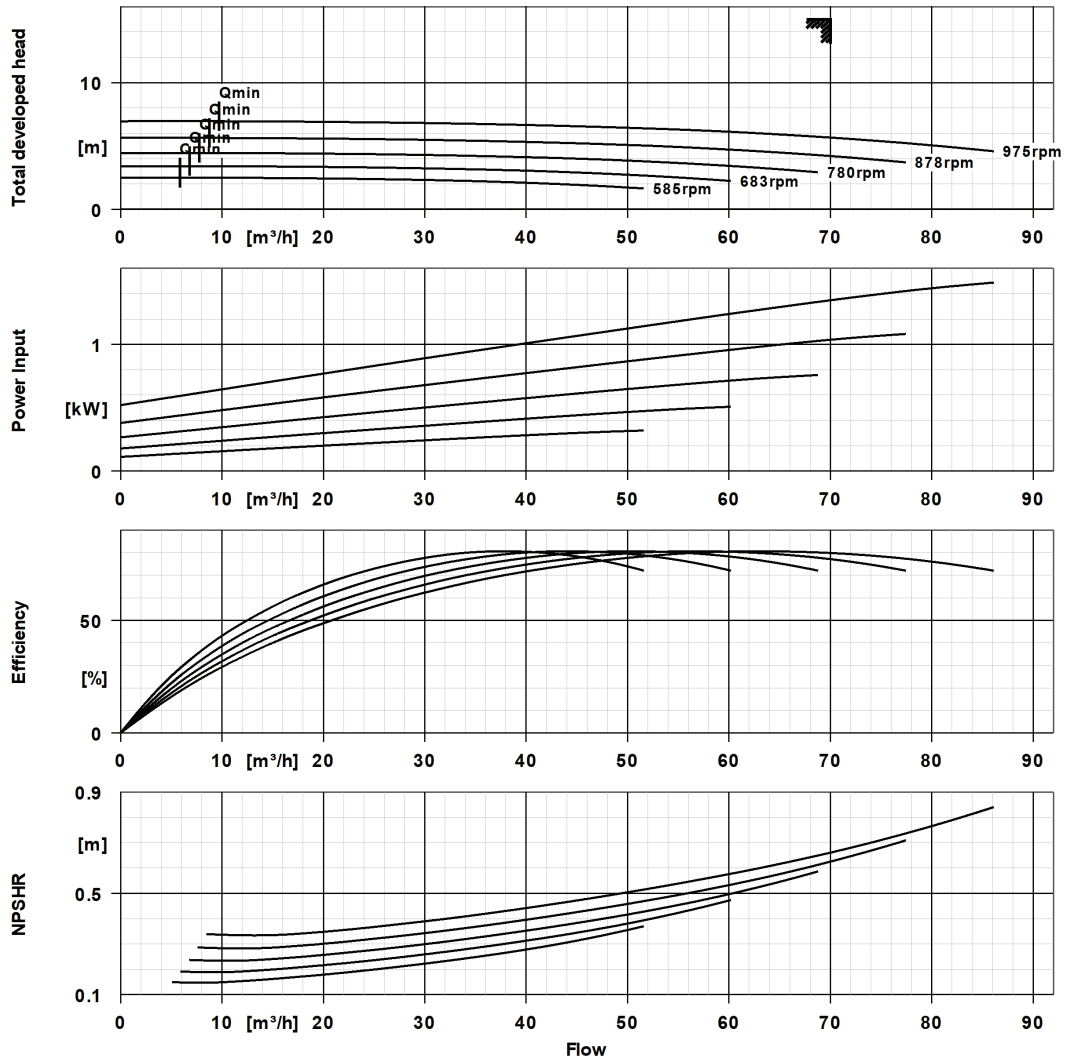


Curve Data

Density Fluid handled	998 kg/m^3	Minimum efficiency index MEI	0.4
Kinematic viscosity Fluid handled	1 mm^2/s	Hydraulic impeller diameter	209.8 mm
Flow rate	69.99 m^3/h	Head	15 m

Etabloc 100-080-200 KC

ETB 100-080-200-KCPBV11 WSFCX4HHB

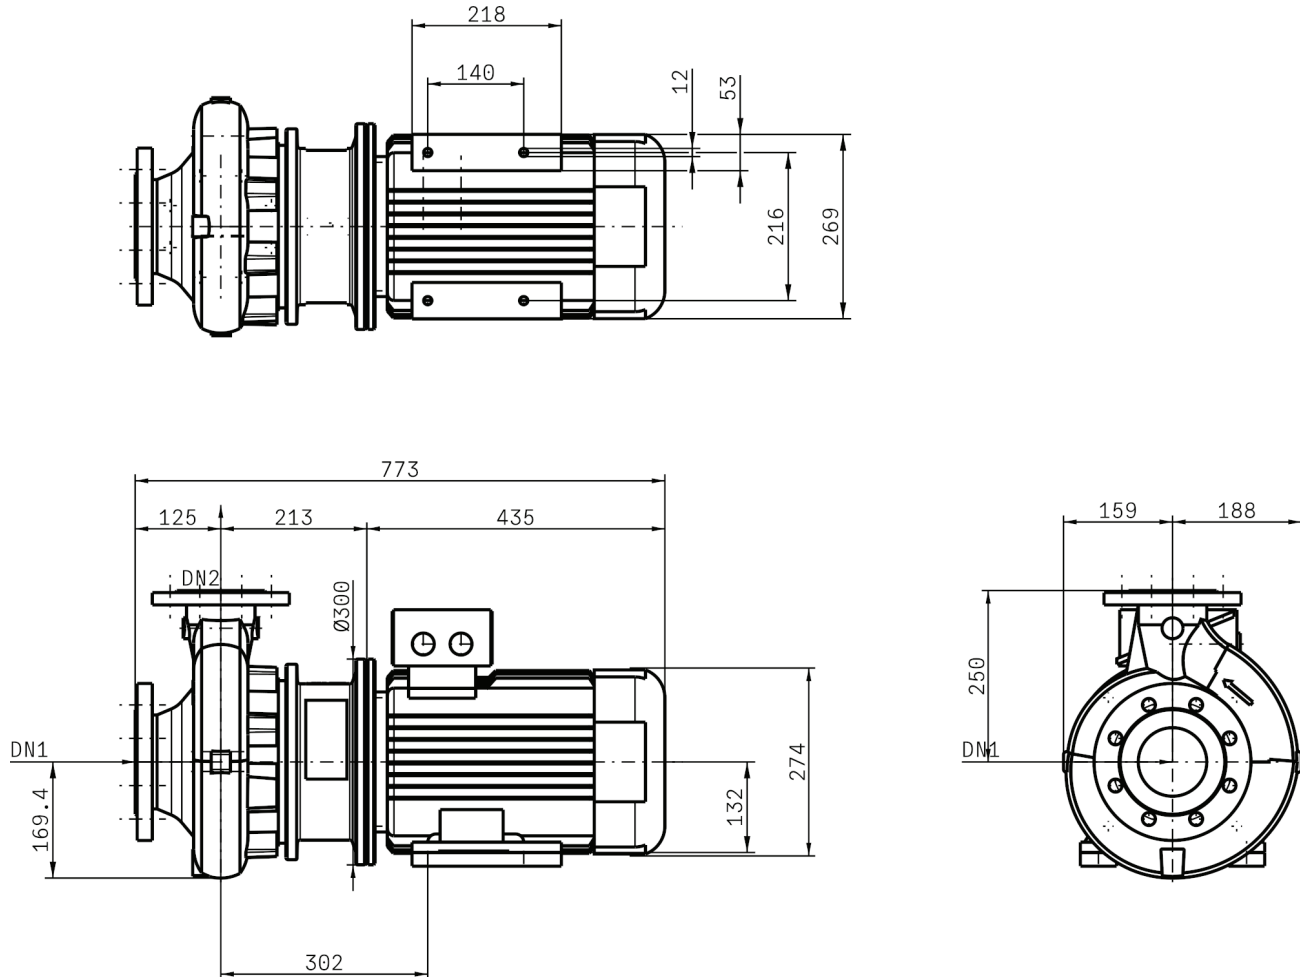

Drawing is not to scale.

Dimensions are given in mm

Motor

Motor manufacturer	KSB's choice
Motor size	132S
Rated power Motor	5.5 kW
Number of motor poles	4
Rated speed Motor	1,465 1/min
Terminal box position of motor (looking at the motor shaft)	360 °

Connections

Nominal diameter Suction nozzle	DN 100
Suction flange bolt hole pattern as per standard	EN1092-2
Nominal diameter Discharge nozzle	DN 80
Discharge flange bolt hole pattern as per standard	EN1092-2
Nominal pressure Suction nozzle	PN 16
Nominal pressure Discharge nozzle	PN 16



Etabloc 100-080-200 KC

ETB 100-080-200-KCPBV11 WSFCX4HHB

Net weight

Total weight Pump	58.18 kg
Total weight Drive	67 kg
Total weight Pump set	125.2 kg
Total weight Assembly/transport aids	3.4 kg

Connect pipelines stress-free

Dimensional tolerances for shaft axis height: DIN 747

Dimensions without tolerances, middle tolerances to: ISO 2768-m

Connection dimensions for pumps: EN735

Dimensions without tolerances - welded parts: ISO 13920-B

Dimensions without tolerances - gray cast iron parts: ISO 8062-CT9

Plan for additional connections see extra drawing